

Robust, Accurate, Real-time Viscosity Results

ViscoPro 2100



Optimize Your Process with Viscosity Analysis You Can Trust

- Robust Technology Ensures Confidence in Viscosity Measurements
- Accurate, Real-Time Analysis Supports Critical Decision Making
- Easy to Install Process Viscosity Transmitter

MEETING TODAY'S NEEDS FOR HIGH QUALITY VISCOSITY ANALYSIS

The PAC ViscoPro 2100 is the next generation viscometer for the process industry. By incorporating the oscillating piston method, which is an industry-proven sensor technology, the ViscoPro 2100 is the best choice for applications requiring fast, real-time analysis and deep, reliable data that correlates tightly with laboratory results.

Built using the same robust sensor technology that has more than 10,000 installations worldwide, the ViscoPro 2100 delivers highly reliable, real-time viscosity data. With a small sample size, easy installation, flexible configuration, and minimal maintenance needs, the ViscoPro 2100 is the ideal process viscometer for almost any refinery, petrochemical, or coatings application.

✓ ROBUST TECHNOLOGY ENSURES CONFIDENCE IN VISCOSITY MEASUREMENTS

✓ ACCURATE, REAL-TIME ANALYSIS SUPPORTS CRITICAL DECISION MAKING



✓ EASY TO INSTALL PROCESS VISCOSITY TRANSMITTER

ROBUST TECHNOLOGY ENSURES CONFIDENCE IN VISCOSITY MEASUREMENTS

Our Unique Oscillating Piston Method Delivers Unmatched Benefits

Insensitive to Outside Environment

The ViscoPro 2100 is insensitive to vibration and flow. The sensor is designed to protect itself from any outside elements.

Long-Term Calibration

The ViscoPro 2100 is self-cleaning due to the constant piston motion. This makes it possible to run for years without recalibration.

Extremely Durable

With no mechanical linkages, the ViscoPro 2100 has hardly any downtime.


Highly Robust

With the ViscoPro 2100, the process can go above or below range without any damage to the system. It is also robust enough to handle heavy samples, such as asphalt and adhesives.

ACCURATE, REAL-TIME ANALYSIS SUPPORTS CRITICAL DECISION MAKING

Repeatability of 0.5% or 1.5% available depending on application package

- Correlation to ASTM D7483 and ASTM D445
- Precisely calibrated viscosity ranges in 20:1 spans covering 0.2 to 10,000cP
- Accurate results for difficult applications, up to 375°C and up to 1,000 psi
- Diagnostic indication of system performance with alarms if below quality standards via Modbus or system user interface
- Simultaneous temperature measurement of the sample
- Optional temperature-compensated viscosity (TCV) measurements available; TCV relates process measurements to a reference temperature value to estimate the effects of temperature per ASTM D341

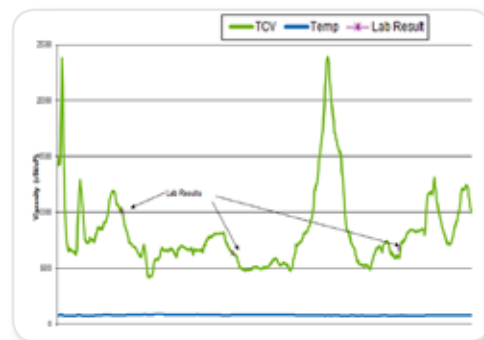

EASY TO INSTALL PROCESS VISCOMETER

Flexible System to Fit Your Needs

- Small sample size requirements enable easy installation and also reduces waste
- Optional user-friendly, password-protected field configuration tool for troubleshooting via a wired/wireless webserver
- Offers a wide range of probes, from 1/4" NPT to 3" ANSI connections
- Real-time data and diagnostics via Modbus
- Hazardous Area Certifications, including FM, IECEX, and ATEX
- Automatic date and time-coded data logging provides an audit trail tool for troubleshooting via a wired/wireless webserver

Significantly improving user convenience with the ViscoPro 2100 Webserver Interface



APPLICATION BENEFITS

COATINGS

BIOMEDICAL, OPTICAL, WIRE, AND CAN

For Coatings applications, applying the proper film thickness can be the most difficult part of the process. Since film thickness is a function of the amount of solids in the coating fluid, viscosity is an excellent measurement to determine if the thickness is correct. The ViscoPro 2100 has significant benefits for coatings applications, including:

- Ease of installation due to its compact size
- Small sample volume reduces the amount of waste of expensive coating materials



REFINERY AND PETROCHEMICAL OIL, LUBRICANT, AND ASPHALT

Viscosity measurements are essential in refinery and petrochemical applications to ensure that end products meet specification. With the ViscoPro 2100, these operations are able to optimize their operations by providing:

- Accurate real-time data that enables process control
- Results that correlate to lab measurements to ensure specification
- A low maintenance transmitter that is low cost to operate





solidpartners provensolutions

U.S.A.

PAC, LP | 8824 Fallbrook Drive | Houston, Texas 77064
T: +1 800.444.TEST | O: +1 281.940.1803 | F: +1 281.580.0719
sales.usa@pacplp.com | service.usa@pacplp.com

FRANCE

BP 70285 | Verson | 14653 CARPIQUET Cedex
T: +33 231 264 300 | F: +33 321 266 293
sales.france@pacplp.com | PACServiceFrance@pacplp.com

GERMANY

Badstrasse 3-5 | P.O.Box 1241 | D-97912 Lauda-Königshofen,
T: +49 9343 6400 | F: +49 9343 640 101
sales.germany@pacplp.com | service.germany@pacplp.com

SINGAPORE

61 Science Park Road | #03-09/10 The Galen
Singapore Science Park III | Singapore 117525
T: +65 6412 0890 | F: +65 6412 0899
sales.singapore@pacplp.com | service.singapore@pacplp.com

NETHERLANDS

P.O.Box 10.054 | 3004 AB Rotterdam
Innsbruckweg 35 | 3047 AG Rotterdam
T: +31 10 462 4811 | F: +31 10 462 6330
sales.netherlands@pacplp.com | service.netherlands@pacplp.com

RUSSIA

Shabolovka Street | 34, Bldg. 2 | 115419 Moscow
T: +7 495 617 10 86 | F: +7 495 913 97 65
sales.russia@pacplp.com | service.russia@pacplp.com

CHINA

Room 1003, Sunjoy Mansion | No. 6 RiTan Rd.
Chao Yang District | Beijing 100020
T: +86 10 650 72236 | F: +86 10 650 72454
sales.china@pacplp.com | service.china@pacplp.com

INDIA

1508 | Dev Corpora | Pokhran Road No.1
Eastern Express Highway | Thane (W) - 400 601
T: +91-22-6700 4848 | F: +91-22-4228 4950
sales.india@pacplp.com | service.india@pacplp.com

MIDDLE EAST

A1 Quds Street, A1 Tawar road | LIU#H13 Dubai Airport Freezone
Near Dubai Airport (terminal 2) | P.O.Box #54781 | Dubai, UAE
T: +971 04 2947 995 | F: +971 04 2395 465
sales.middleeast@pacplp.com | service.middleeast@pacplp.com

SOUTH KOREA

#621 World Vision Building | 24-2, Youido-dong
Seoul 150-010
T: +82 2785 3900 | F: +82 2785 3977
sales.southkorea@pacplp.com | service.southkorea@pacplp.com

THAILAND

26th Floor, M. Thai Tower | All Seasons Place
87 Wireless Road | Lumpini, Phatumwan | Bangkok 10330
T: +66 2627 9410 | F: +662627 9401
sales.thailand@pacplp.com | service.thailand@pacplp.com

PAC Authorized Representatives are also located in most countries worldwide. For more information visit www.pacplp.com

PAC L.P.

PAC, a leading global provider of advanced analytical instruments for laboratories and online process applications. With a portfolio of over 200 instruments, PAC serves its customers with cutting edge technology and significant R&D resources to support its core technologies, including chromatography, elemental analysis, physical properties, fuels composition, and laboratory automation

www.pacplp.com

STANDARD SPECIFICATIONS

Input Power	24 VDC, 12 W
Outputs	Up to four 4-20mA outputs, Modbus RTU, (Full Duplex)
Accuracy	Accuracy \pm 1% Full Scale* Correlates to ASTM D7483 & D445 * \pm of 5% of full scale 500-10,000 Range
Repeatability	\pm 1.5% of reading in CV1 software package \pm 0.5% of reading in CV2 software package
Ranges	0.25-10,000cP (0.25-5cP, 0.5-10cP, 1-20cP, 2.5-50cP, 5-100cP, 10-200cP, 25-500cP, 50-1,000cP, 100-2,000cP, 250-5,000cP, 500-10,000cP)
Wetted Components	Standard 316L/430 Stainless Steel, Optional Hastelloy and Silicone Coating
Maximum Process Temperature	190°C; high temperature option up to 375°C
Ambient Temperature Range	Up to 60°C (electronics)
Maximum Process Pressure	Up to 1000 psi (70.3 bar), Optional: 2200 psi (151 bar)
Temperature Sensor	PT100
Certifications	FM, cFM, CE, ATEX, IECeX, NEMA4,IP-66
Dimensions	DIN 3.3" 9(h) x 7.1"(w) x 4" (d), 84mm(h) x 180mm(w) x 100mm (d) Ex (w/o sensor) 4.5" (w) x 4.8" (h)x5.7" (d)
Alarm	Output 190mA open collector (3V-50VDC)
Weight	DIN 3 lb 1.4kg Ex 4lb 1.8kg